


PTDCC/15

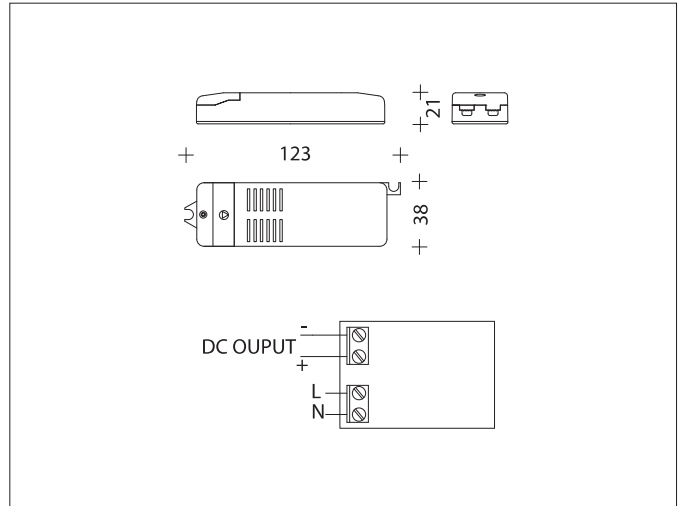

Alimentatore indipendente 15W in corrente costante continua.
Elevata efficienza e peso e volume ridotti.
Corrente di uscita costante 350mA, 500mA o 700mA.
Equipaggiato con morsetti a vite.

PROTEZIONI:

termica, sovraccarico, sovratensione e cortocircuito.

Attenzione: connettere esclusivamente i moduli led in serie, non connettere interruttori sul circuito secondario.

Norme di riferimento:

- Sicurezza: EN 61347-1; EN 61347-2-13
- Radio disturbi: EN 55015
- Armoniche: EN 61000-3-2
- Immunità: EN 61547

15W independent constant current power supply.
High efficiency and reduced weight and size.
Steady output current 350mA, 500mA or 700mA.
Equipped with screw terminals.

PROTECTIONS:

thermal, overload, overvoltage and short circuit.

Warning: led modules serial connections only, never use switches on secondary side.

Standard reference:

- Safety: EN 61347-1; EN 61347-2-13
- Radio Interferencies: EN 55015
- Harmonics: EN 61000-3-2
- Immunity: EN 61547

	V	Hz	W	W min	mA	V _{OUT}	ta °C	tc °C	in	out	LPH ↓mm	?	Ⓜ	
PTDCC/15/350/B V2653000006	220÷240	50÷60	17	5	350	48,5	40	90	0,75	2,5	38x123x21	10	94,0	Ⓜ
PTDCC/15/500/B V2653000011	220÷240	50÷60	17	5	500	28,5	40	90	0,75	2,5	38x123x21	10	94,0	
PTDCC/15/700/B V2653000009	220÷240	50÷60	17	5	700	23,5	40	90	0,75	2,5	38x123x21	10	94,0	Ⓜ

Numero di LED collegabili in funzione del tipo di alimentatore utilizzato

Number of LED as a function of used power supply type

Tipo di alimentatore Type of power supply	CDT	Numero di LED Number of LED	
		bianco/blu/verde white/blue/green	rosso/giallo red/yellow
PTDCC/15/350/B		4÷12	4÷13
PTDCC/15/500/B		2÷6	2÷7
PTDCC/15/700/B		2÷5	2÷5